

◆ 型号含义 Type description

L	Z	Z	B	J	9	-	12	
								额定电压 (kV) Rated voltage(kV)
								设计序号 Design No.
								加强型 Strengthen
								带有保护级 With protective class
								浇注绝缘 Cast-resin insulated
								支柱式 Seat type
								电流互感器 Current transformer





◆ 技术参数 Technical data

产品型号 Type	额定电流比 Rated transformation ratio(A)	级次组合 Accuracy Classes combination	准确级及额定输出 (VA) Accuracy class and rated output COS ϕ = 0.8				一秒热稳定电流 1s thermal current (kA)	动稳定电流 Rated dynamic current(kA)
			0.2S	0.2	0.5	10P15		
LZZBJ9-12 (AS12/150b/2S) (AS12/150b/4S) (AS12/175b/2S) (AS12/175b/4S)	5/5	0.2S/10P15 0.2/10P15 0.5/10P15	10	10	10	15	0.8	1.9
	10/5						1.5	3.8
	15/5						2.3	5.8
	20/5						3	7.5
	30/5						4.5	11.2
	40/5						6	15
	50/5						7.5	18.8
	75/5						11.5	29
	100/5						15	37.5
	150~200/5						22.5	56.5
	300~600/5						45	112.5
	800~2500/5						63	157.5

注：用户如有特殊要求可与我公司协商确定，动热稳定可按用户要求。

Note: Any special requirements can be negotiated with us, thermal and heat both stable, we can customized your requirement.

◆ 外形及安装尺寸 Overall dimension drawing

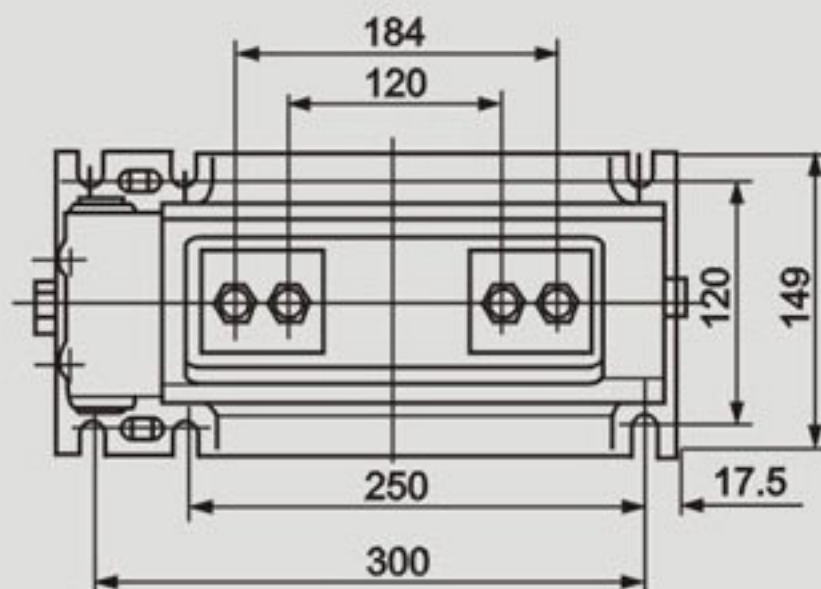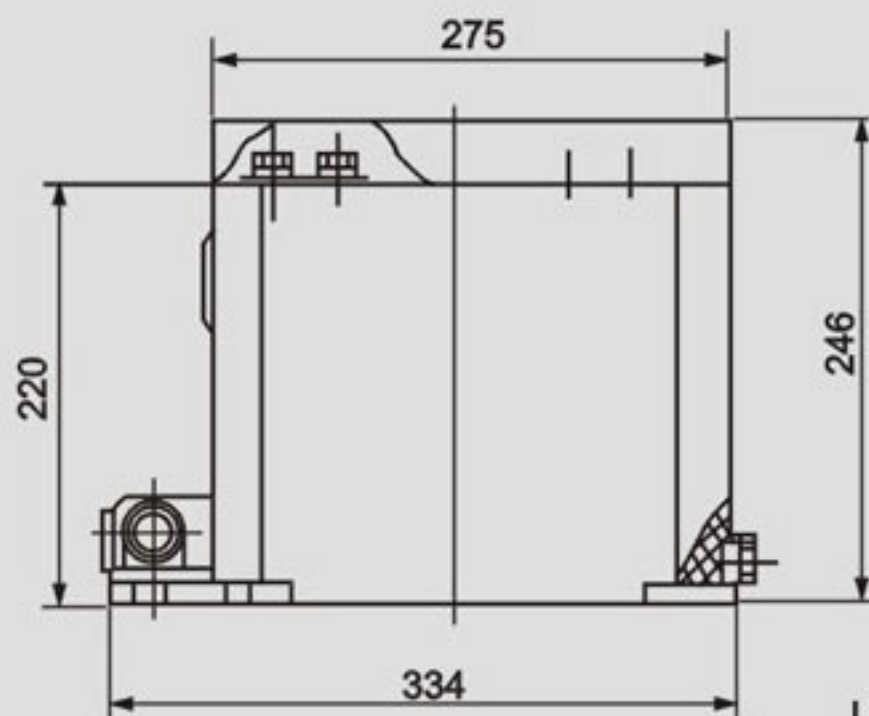

LZZBJ9-12(AS12/150b/2S)