

# LDJ2-10Q/210-Y

型电流互感器 CURRENT TRANSFORMER



上海互凌

Shanghai Huling Electric Co., Ltd.

户内 单相 环氧树脂浇注式

INDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE

## 技术参数 Technical data

● 产品性能符合标准 GB1208和IEC60044-1  
The current transformers are in accordance with GB1208 and IEC60044-1 standards

● 额定绝缘水平 12/42/75kV  
Rated insulation level 12/42/75kV

● 额定频率50Hz或60Hz  
Rated frequency 50Hz or 60Hz

● 额定二次电流: 5A或1A  
Rated secondary current 5A or 1A


● 环境温度: -5℃~+40℃  
Ambient temperature -5℃~+40℃




| 额定一次电流<br>Rated primary current(A) | 准确级组合<br>Accuracy classes combination                                         | 额定二次输出<br>Rated secondary output(VA) |     |     |      | 一秒热稳定电流<br>1s thermal current(kA) | 动稳定电流<br>Rated dynamic current(kA) |    |     |
|------------------------------------|-------------------------------------------------------------------------------|--------------------------------------|-----|-----|------|-----------------------------------|------------------------------------|----|-----|
|                                    |                                                                               | 0.2(S)                               | 0.2 | 0.5 | 5P10 |                                   |                                    |    |     |
| 5                                  | 0.2(S)/0.2(S)<br>0.2(S)/0.5(S)<br>0.5(S)/0.5(S)<br>0.2(S)/5P10<br>0.5(S)/5P10 | 10                                   | 10  | 15  | 15   | 0.6                               | 1.5                                |    |     |
| 10                                 |                                                                               |                                      |     |     |      | 1.1                               | 2.75                               |    |     |
| 15                                 |                                                                               |                                      |     |     |      | 1.7                               | 4.25                               |    |     |
| 20、25                              |                                                                               |                                      |     |     |      | 2.7                               | 6.75                               |    |     |
| 30                                 |                                                                               |                                      |     |     |      | 4                                 | 10                                 |    |     |
| 40                                 |                                                                               |                                      |     |     |      | 5                                 | 12.5                               |    |     |
| 50                                 |                                                                               |                                      |     |     |      | 9                                 | 22.5                               |    |     |
| 75                                 |                                                                               |                                      |     |     |      | 13.5                              | 33                                 |    |     |
| 100                                |                                                                               |                                      |     |     |      | 18                                | 45                                 |    |     |
| 150                                |                                                                               |                                      |     |     |      | 27                                | 63                                 |    |     |
| 200、250                            |                                                                               |                                      | 10  |     |      | 15                                | 20                                 | 63 | 100 |
| 300、400                            |                                                                               |                                      |     |     |      |                                   |                                    |    |     |
| 500、800                            |                                                                               |                                      |     |     |      |                                   |                                    |    |     |
| 1000、1250                          |                                                                               |                                      |     | 80  | 130  |                                   |                                    |    |     |

## 外形及安装尺寸 Overall dimension drawing

LDJ2-10Q/210-Y 5-250A

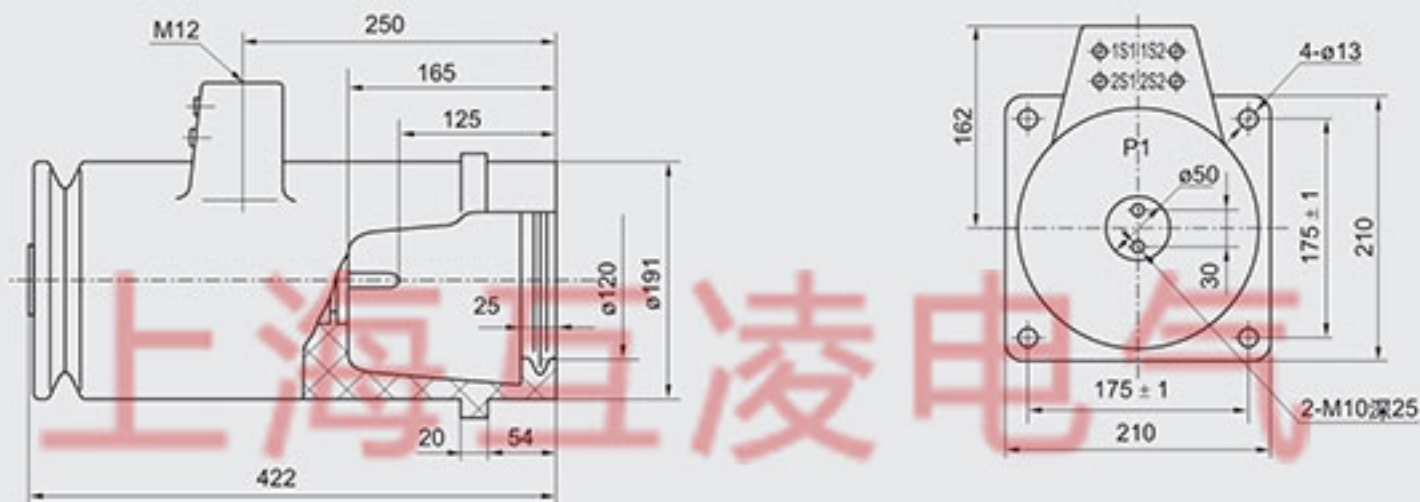

LDJ2-10Q/210-Y 300-1250A

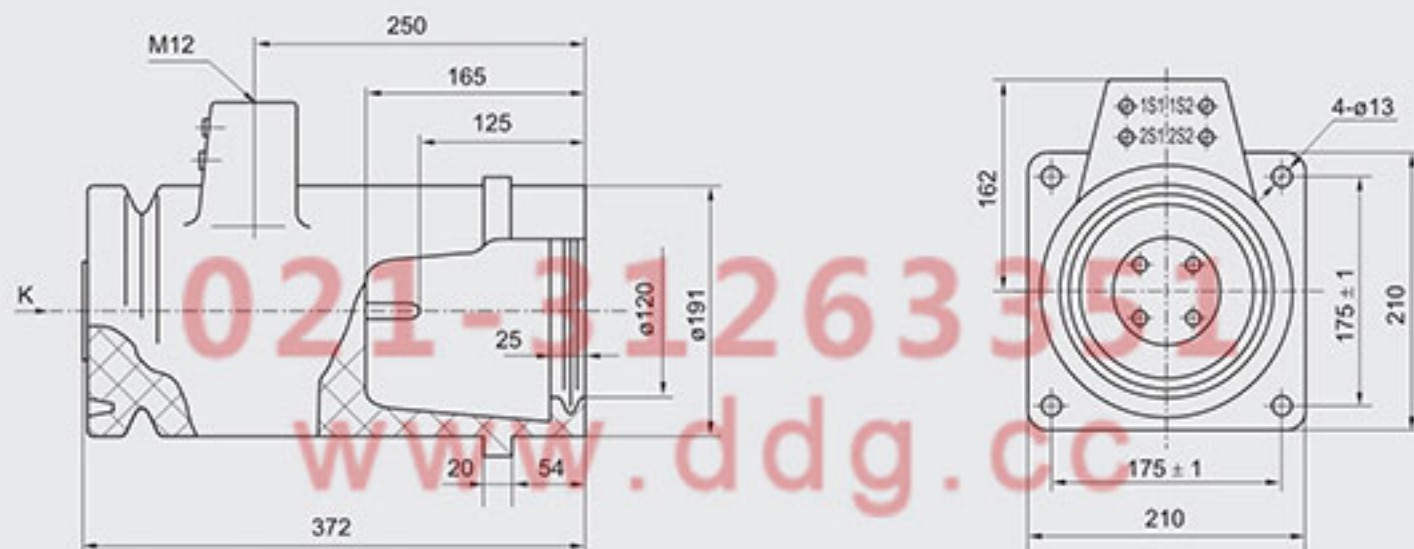

K<sub>向</sub> DirectionK

