

# LZZBJ9-35D

型电流互感器 CURRENT TRANSFORMER




上海互凌

Shanghai Huling Electric Co.,Ltd.

## 型号含义 / Type description

LZZBJ9-35D

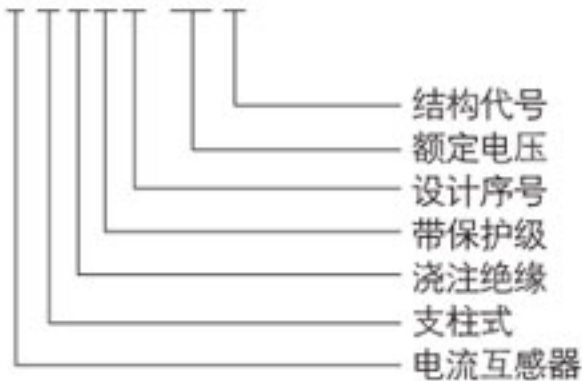

Structure code  
Rated voltage (kV)  
Design No.  
With protective class  
Casting insulation  
For type  
Current transformer



## 技术参数 / Technical data

| 额定一次电流<br>Rated primary current(A) | 准确级组合<br>Accuracy classes combination | 额定二次输出<br>Rated secondary output(VA) |      |     |     |      |      |      | 4秒热电流<br>(kA有效值)I <sub>th</sub> /4s<br>(kA virtual value) | 动稳定电流<br>Rated dynamic current (kA) |
|------------------------------------|---------------------------------------|--------------------------------------|------|-----|-----|------|------|------|-----------------------------------------------------------|-------------------------------------|
|                                    |                                       | 0.2S                                 | 0.5S | 0.2 | 0.5 | 5P10 | 5P15 | 5P20 |                                                           |                                     |
| 10                                 | 0.2(S)/0.2(S)                         | 10                                   | 10   | 15  | 30  | 50   | 30   | 20   | 1.44                                                      | 3.5                                 |
| 15                                 | 0.2(S)/0.5(S)                         |                                      |      |     |     |      |      |      | 2.1/2                                                     | 5.25                                |
| 20、25                              | 0.2(S)/5P                             |                                      |      |     |     |      |      |      | 2.822                                                     | 7.1                                 |
| 30-100                             | 0.5(S)/5P                             |                                      |      |     |     |      |      |      | 150lin/2                                                  | 375lin/2                            |
| 150                                | 5P/5P                                 |                                      |      |     |     |      |      |      | 31.5                                                      | 80                                  |
| 200、250                            | 0.2(S)/0.2(S)/5P                      | 15                                   | 15   | 30  | 50  | 50   | 40   | 30   | 31.5/2                                                    | 80                                  |
| 300-500                            | 0.2(S)/0.5(S)/5P                      |                                      |      |     |     |      |      |      | 31.5/3                                                    | 80                                  |
| 600-800                            | 0.2(S)/5P/5P                          |                                      |      |     |     |      |      |      | 31.5/4                                                    | 80                                  |
| 1000-3150                          | 0.5(S)/5P/5P                          |                                      |      |     |     |      |      |      | 40/4                                                      | 100                                 |

## 外形及安装尺寸 / Overall dimension drawing

